

BARONESS

Quality on Demand

5-Unit Reel Mower

LM2400



5-Unit Reel Mower
LM2400

THE FINEST REEL AND BEDKNIFE IN THE INDUSTRY

Utilising the Baroness cross technology hydrostatic drive system, the LM2400 combines the turning abilities of a parallel circuit design with the climbing capabilities of a series circuit.

Optimum weight distribution, low weight, maximum overlap and minimum distance between cutting units - all elements that combine with our finest cutting cylinder and bedknife technology to produce an outstanding cutting finish in the toughest of conditions.



LOW CENTRE OF GRAVITY

The low centre of gravity minimises weight transfer on sloping terrain and optimises traction capability.



LIGHTWEIGHT (1300kg)



Offering the best balance between cutting performance and weight, the LM2400 is kind to the turf.

Low running costs, low weight,
high traction equals Ultimate
Cutting Performance!



OPTIMUM CUTTING PERFORMANCE

With the shortest possible distance between the rear cutting units and the front units there is no uneven cutting when turning and no loss of overlap on sloping terrain.

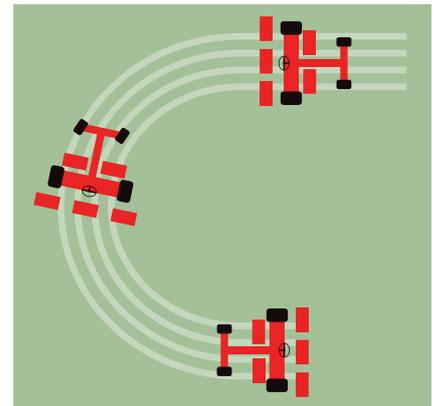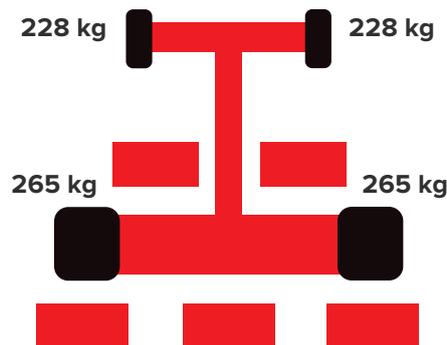

FOUR WHEEL DRIVE

Baronesse cross technology design ensures optimum all-wheel drive.



LOW GROUND PRESSURE/ HIGH TRACTION

The LM2400 offers outstanding balance between low ground pressure and high traction on difficult terrain.



LOW RUNNING COSTS & LONG SERVICE LIFE

In line with all Baronesse products, the LM2400 has low running costs and a long service life.

LM2400 SPECIFICATION



MODEL	LM2400
Total length	303 cm
Working width	318 cm
Transport width	226 cm
Height	135cm (to steering wheel)
Weight	1300 kg
Minimum turning radius	290cm
Engine	Kubota D1105-T (Diesel turbo) 4 – cycle liquid cooled, 3 cylinder diesel engine. 1123 litre displacement. Maximum output 24.5 kW (33.3PS) @ 3000 rpm*. Fuel tank capacity 38 litres.

Speed	Forwards	0 – 16 km/h
	Reverse	0 – 8.0 km/h
Drive system	Hydrostatic full time 4-wheel drive	
Cutting width	277 cm	
Cutting height	10 – 60 mm	
Cutting cylinder diameter	163mm	
Cutting cylinder – no. of blades	9	
Work rate	22,160 m ² /h	
Slope rating	15 degrees maximum	
Tyre size - front	26.5 x 14.0 - 12	
Tyre size - rear	20 x 10.0 - 10	

*Maximum engine speed, factory setting = 3100 rpm
Specifications may be subject to change without notice.



ADDRESS: Unit 5 Hatch Industrial Park,
Greywell Road, Basingstoke, RG24 7NG

TEL: 01256 461591

EMAIL: sales@baronessuk.com

www.baronessuk.com

Content and designs provided here are subject to change without notice.

Your dealer



BARONESS